


Fire Rated Multicore



0.6/1kV Single Core

X-HF-110 Insulated, HFS-110-TP RED Sheathed Cable

Description: 0.6/1kV CU/X-HF110/HFS-110-TP
ASNZS5000.1

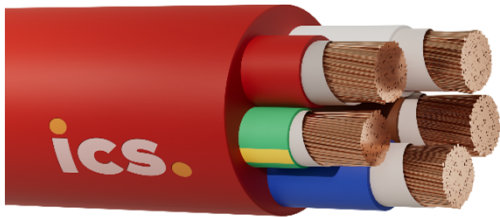

Application: This cable can be used for mains power supply in switchboards and power stations. It can be installed in trenches, cable duct and cable trunking.

Voltage Rating: 0.6/1KV

Construction: Fin Plain Annealed copper, Class 5 Circular Stranded

Insulation: X-HF-110, Mica Tape, White ASNZS3808

Outer Sheath: HFS-110-TP, RED ASNZS3808, HFS (Halogen Free or LSZH)

Temperature Range: Min -25° , Max 110° , Flame Retardant

Standards:

AS/NZS 1660.5.1 / IEC 60332-3-22

AS/NZS 1660.5.2 / IEC 61034-2

AS/NZS 1660.5.3 / IEC 60754-1

AS/NZS 1660.5.4 / IEC 60754-2

AS/NZS 1660.5.5 / IEC 60331

Bending Radius: 10 x OD

Part Number	No of cores and nominal cross section area [mm]	Nominal Thickness of insulation [mm]	Thickness of PVC Outer sheath	Earth Conductor cross section	Overall diameter App.	Maximum wire OD phase	Net weight	D. C. resistance of conductor 20°C (Ω/km)
	No*Section	Phase core	[mm]	[mm]	[mm]	[mm]	[kg/m]	Voltage withstand test(kV)-3.5
22.5CIRFLEXFR	2*2.5+1*2.5	0.7	1.8	2.5	16.4	0.26	0.313	7.980
24CIRFLEX	2*4+1*2.5	0.7	1.8	2.5	17.2	0.31	0.260	4.950
26CIRFLEX	2*6+1*2.5	0.7	1.8	2.5	18.2	0.31	0.312	3.300
210CIRFLEX	2*10+1*4	0.7	1.8	4.0	20.1	0.41	0.430	1.980
31.5CIRFLEX	3*1.5+1*1.5	0.7	1.8	1.5	15.8	0.26	0.245	13.300
32.5CIRFLEX	3*2.5+1*2.5	0.7	1.8	2.5	17.8	0.26	0.360	7.980
42.5CIRFLEX	4*2.5+1*2.5	0.7	1.8	2.5	19.4	0.26	0.451	7.980
44CIRFLEX	4*4+1*2.5	0.7	1.8	4.0	20.6	0.31	0.543	4.950
46CIRFLEX	4*6+1*2.5	0.7	1.8	2.5	21.9	0.31	0.656	3.300
410CIRFLEX	4*10+1*4	0.7	1.8	4.0	24.4	0.41	0.905	1.980
416CIRFLEX	4*16+1*6	0.7	1.8	6.0	27.5	0.41	1.264	1.210
425CIRFLEX	4*25+1*6	0.7	1.8	6.0	31.6	0.41	1.779	0.780
435CIRFLEX	4*35+1*10	0.7	1.8	10.0	35.2	0.41	2.343	0.554
450CIRFLEX	4*50+1*16	0.7	1.8	16.0	38.8	0.41	3.198	0.386

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of ICSLTD is indicative only and shall not be binding on ICSLTD or be treated as constituting a representation on the part of ICSLTD.

Fire Rated Multicore



Description: 0.6/1kV CU/X-HF110/HFS-110-TP ASNZS5000.1

Current Carrying Capacity

Three and Four Core

Reference Ambient Temperature: 30°C in air and 15°C in ground

Conductor Size	Unenclosed Spaced	Unenclosed touching surface	Exposed to sun	Enclosed metallic enclosure in Air	Underground Buried Direct	Underground wiring enclosure
[mm]						
10	86	80	73	70	75	75
16	113	106	95	90	129	96
25	150	140	126	120	167	125
35	185	173	155	147	201	152
50	233	218	195	187	240	189
70	292	273	243	232	294	230
95	350	327	290	281	353	275
120	414	385	340	327	402	316
150	475	442	389	381	452	361
185	540	503	441	430	510	404
240	644	598	522	523	591	480
300	736	683	594	.	667	540
400	874	809	701	.	756	642
500	1002	926	798	.	845	721

Note: Please be advised that the information contained in this table, along with the typical installation conditions applicable in New Zealand, is sourced from AS/NZS 3008.1.2:2017. This content has been utilised with the express permission of Standards New Zealand under Copyright Licence SZ00025278 and has either been reproduced or adapted. For comprehensive details, we recommend consulting the entire Standard, which can be obtained for purchase directly from Standards New Zealand via www.standards.co.nz.

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of ICSLTD is indicative only and shall not be binding on ICSLTD or be treated as constituting a representation on the part of ICSLTD.